

LED Pro-Ceiling

STR. 1/2


LED Pro-Ceiling 296x1196 mm (přisazené)

40003141

EAN: 8720604742343

VYCHUTNEJTE SI TEPLO DEKORATIVNÍHO SVĚTLA V KOMBINACI S RAFINOVANOSTÍ MODERNÍHO DESIGNU

Řada svítidel Prolumia LED Pro-Ceiling je jedinečná svým designem. Kombinace teplého dekorativního osvětlení s moderním designem této doby. K dispozici v kulatém nebo čtvercovém provedení pro montáž na strop nebo na stěnu. Řada Prolumia LED Pro-Ceiling má životnost přes 50 000 hodin, je dodávána s integrovaným napájecím zdrojem a je instalována snadno a rychle!

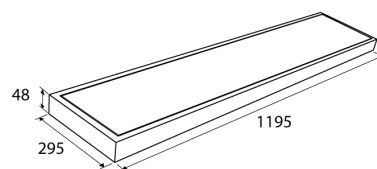

VLASTNOSTI PRODUKTU

Suitable for wall mounting	✓	Nominal voltage	220 240 Volt
Suitable for wall mounting	✓	Nominal current	1000 1000 Milliampere
Suitable for suspended mounting	✗	Rated lifetime L70/B50 at 25 °C	50000 Hour
Suitable for ceiling mounting	✓	Rated ambient temperature according to IEC 62722-2-1	-10 40 Degrees celsius
Suitable for built-in mounting	✗	Luminaire efficacy	80,5 Lumen/Watt
Suitable for surface mounting	✓	Rated luminous flux according to IEC 62722-2-1	3220 Lumen
Suitable for light line configuration	✗	Max. system power	40 Watt
Suitable for workplace according to EN 12464-1	✗	Colour temperature	4200 4200 Kelvin
Lamp type	LED not exchangeable	Power factor	0,9
With light source	✓	Width	296 Millimetre
Lamp holder	Other	Height/depth	48 Millimetre
Housing material	Aluminium	Length	1196 Millimetre
Surface protection housing	Lacquered	Unified Glare Ratio (UGR)	22
Housing colour	White		
Material cover	Plastic, opal		
Type of grid	None		
Voltage type	AC		
Type of control gear	LED operating device current-controlled		
With control gear	✓		
Dimming 0-10 V	✗		
Dimming 1-10 V	✗		
Dimming DALI	✗		
Dimming DMX	✗		
Dimming GPRS	✗		
Dimming LineSwitch	✗		
Dimming DSI	✗		
Dimming manufacturer's proprietary system	✗		
Dimming mains voltage modulation	✗		

LED Pro-Ceiling

PAGINA 2/2

LED Pro-Ceiling 296x1196 mm (přisazené)

40003141

EAN: 8720604742343

VLASTNOSTI PRODUKTU

(Pokračování)

Dimming phase cut-off (trailing edge)	✗
Dimming phase cut-on (leading edge)	✗
Dimming programmable	✗
Dimming potentiometer (integrated)	✗
Dimming RF	✗
Dimming Sine Wave Reduction	✗
Dimming Touch and Dim	✗
Dimming Zigbee	✗
Dimming with push-button	✗
No dim function	✓
Dimming depending on control gear	✓
Light distributor	Diffuser lens/optic/panel
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Colour consistency (McAdam ellipse)	SDCM4
Light outlet	Direct
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Degree of protection (IP)	IP40
Impact strength	IK08
Protection class according to IEC 61140	II
Emergency power supply integrated	✗
Suitable for emergency lighting	✗
With movement sensor	✗
With light sensor	✗
Covering of the luminaire with thermally insulating material possible	✗
With air slots	✗
Colour of light according to EN 12464-1	Neutral white 3300-5300 K
Colour of light	White
Colour rendering index CRI	80-89
Type of wiring	Ending
Connection type	Screw terminal
Colour of light adjustable	No
Luminous flux adjustable	No
Beam angle adjustable	No
Operation by Bluetooth	✗
Compatible with Apple HomeKit	✗
Compatible with Google Assistant	✗
Compatible with Amazon Alexa	✗
IFTTT support available	✗