

LED I-Panel

STR. 1/2


LED I-Panel 1195x295 mm

40007936

EAN: 8719689122133

ALTERNATIVA K PŮVODNÍM ZAPUŠTĚNÝM FLUORESCENČNÍM SVÍTIDLŮM

Řada svítidel LED I-Panel je výbornou LED alternativou k tradičním vestavným fluorescenčním svítidlům. Úzké linie a nízká montážní výška dávají této řadě moderní a nadčasový charakter. Díky různým možnostem instalace: zapuštění, instalace na povrch nebo zavěšení, jsou vhodná pro širokou škálu aplikací.

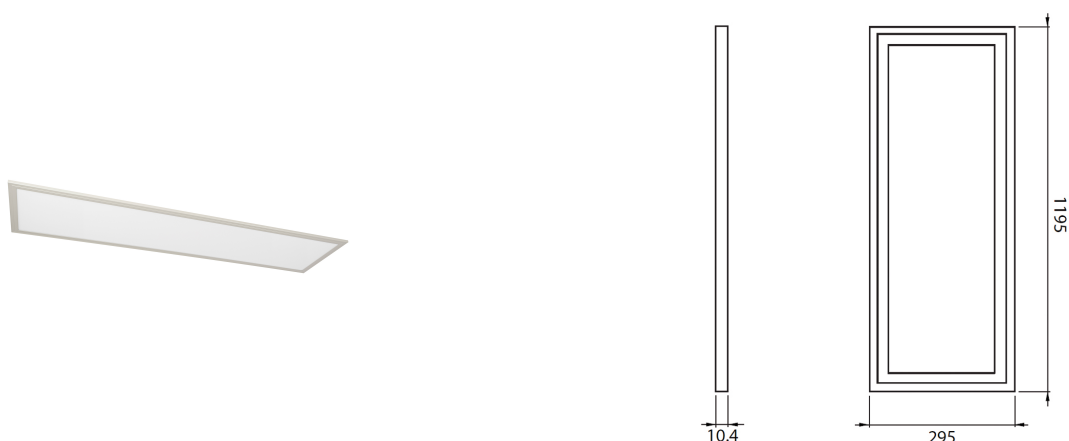

VLASTNOSTI PRODUKTU

Suitable for wall mounting	✗	LED nominal current at constant current	1230 1270 Milliampere
Suitable for wall mounting	✗	Nominal current	1250 1250 Milliampere
Suitable for suspended mounting	✓	Rated lifetime L70/B50 at 25 °C	50000 Hour
Suitable for ceiling mounting	✓	Rated ambient temperature according to IEC 62722-2-1	-20 50 Degrees celsius
Suitable for built-in mounting	✓	Luminaire efficacy	95 Lumen/Watt
Suitable for surface mounting	✗	Rated luminous flux according to IEC 62722-2-1	3990 Lumen
Suitable for light line configuration	✗	Max. system power	42 Watt
Suitable for workplace according to EN 12464-1	✗	Colour temperature	4000 4000 Kelvin
Lamp type	LED not exchangeable	Power factor	0,9
With light source	✓	Width	295 Millimetre
Lamp holder	Other	Height/depth	10,4 Millimetre
Housing material	Aluminium	Length	1195 Millimetre
Surface protection housing	Lacquered	Built-in length	1195 Millimetre
Housing colour	White	Built-in width	295 Millimetre
Material cover	Plastic, opal	Total harmonic distortion	0,2
Type of grid	None	Built-in height/depth	10,4 Millimetre
Voltage type	AC	Unified Glare Ratio (UGR)	19
Type of control gear	LED operating device current-controlled		
With control gear	✗		
Dimming 0-10 V	✗		
Dimming 1-10 V	✗		
Dimming DALI	✓		
Dimming DMX	✗		
Dimming GPRS	✗		
Dimming LineSwitch	✗		
Dimming DSI	✗		
Dimming manufacturer's proprietary system	✗		
Dimming mains voltage modulation	✗		

LED I-Panel

PAGINA 2/2

LED I-Panel 1195x295 mm

40007936

EAN: 8719689122133

VLASTNOSTI PRODUKTU

(Pokračování)

Dimming phase cut-off (trailing edge)	✗
Dimming phase cut-on (leading edge)	✗
Dimming programmable	✗
Dimming potentiometer (integrated)	✗
Dimming RF	✗
Dimming Sine Wave Reduction	✗
Dimming Touch and Dim	✗
Dimming Zigbee	✗
Dimming with push-button	✗
No dim function	✗
Dimming depending on control gear	✓
Light distributor	Diffuser lens/optic/panel
Light distribution	Symmetric
Beam angle	> 80° - Extreme wide beam
Light outlet	Direct
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Degree of protection (IP)	IP52
Degree of protection (NEMA)	1
Protection class according to IEC 61140	II
Emergency power supply integrated	✗
Suitable for emergency lighting	✗
With movement sensor	✗
With light sensor	✗
Covering of the luminaire with thermally insulating material possible	✗
With air slots	✗
Colour of light according to EN 12464-1	Neutral white 3300-5300 K
Colour of light	White
Colour rendering index CRI	80-89
Type of wiring	Ending
Connection type	Blade terminal (expired)
Operation by Bluetooth	✗