

LED Pro-Stock

STR. 1/2


LED Pro-Stock 1178 mm 150W

40644254

EAN: 8720604748307

INTELIGENTNÍ A VODĚODOLNÉ

Řada svítidel LED Pro-Stock se skládá z lineárních svítidel High-Bay o výkonu od 30W do 180W. Použitím středně výkonných LED diod Nichia a Meanwell napájení je dosaženo účinnosti systému až 135 Lm / W. Díky více možnostem montáže a řadě dostupných optik je řada svítidel Prolumia Pro-Stock vhodná pro mnoho použití, jako je například nasvětlení meziregálových uliček ale i velkých otevřených prostorů.

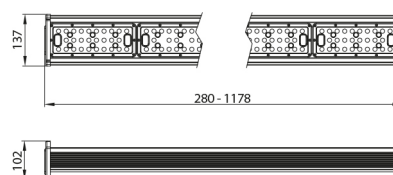

VLASTNOSTI PRODUKTU

Mounting method	Surface mounting	Suitable for number of light sources	1
Lamp type	LED not exchangeable	Nominal voltage	240 240 Volt
With light source	✓	Rated lifetime L70/B50 at 25 °C	100000 Hour
Suitable for auxiliary lamp	✗	Rated ambient temperature according to IEC 62722-2-1	-30 50 Degrees celsius
Lamp holder	Other	Rated luminous flux according to IEC 62722-2-1	21000 Lumen
Housing material	Aluminium	Luminaire efficacy	140 Lumen/Watt
Housing colour	Black	Max. system power	150 Watt
Voltage type	AC	Colour temperature	4000 4000 Kelvin
Type of control gear	LED operating device voltage-controlled	Total harmonic distortion	20
Exchangeable control gear	✗	Power factor	0,9
With control gear	✓	Width	137 Millimetre
Dimming 0-10 V	✗	Height/depth	102 Millimetre
Dimming 1-10 V	✗	Length	1178 Millimetre
Dimming GPRS	✗	Number of poles	3
Dimming DALI	✓	Conductor cross section	1,5 Square millimetre
Dimming DMX	✗		
Dimming DSI	✗		
Dimming phase cut-off (trailing edge)	✗		
Dimming phase cut-on (leading edge)	✗		
Dimming potentiometer (integrated)	✗		
Dimming LineSwitch	✗		
Dimming manufacturer's proprietary system	✗		
Dimming mains voltage modulation	✗		
Dimming programmable	✗		
No dim function	✗		
Dimming RF	✗		
Dimming Sine Wave Reduction	✗		
Dimming Touch and Dim	✗		
Dimming Zigbee	✗		
Dimming with push-button	✗		
Light distributor	Refractor lens		

LED Pro-Stock

PAGINA 2/2

LED Pro-Stock 1178 mm 150W

40644254

EAN: 8720604748307

VLASTNOSTI PRODUKTU

(Pokračování)

Light distribution	Symmetric/asymmetric
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Reflector	None
Material reflector	Without reflector (expired)
Beam angle	> 80° - Extreme wide beam
Colour consistency (McAdam ellipse)	SDCM3
Degree of protection (IP)	IP65
Degree of protection (NEMA)	3
Impact strength	IK10
Protection class according to IEC 61140	II
Suitable for emergency lighting	✗
Colour of light	White
Colour rendering index CRI	70-79
Constant light output (CLO)	✗
Colour of light adjustable	No
Beam angle adjustable	No
Luminous flux adjustable	No
Type of wiring	Ending
Connection type	Other
With protective cover	✓