

LED Pro-Cone

STR. 1/2


Pro-Cone typ optiky 5

41380149

EAN: 8720874790976

KRUHOVÉ LED SVÍTIDLO S ANTIVANDAL OCHRANOU PRO OPTIMÁLNÍ OSVĚTLENÍ VEŘEJNÝCH PROSTOR

Pro-Cone je kruhové LED svítidlo s vysokou ochranou proti mechanickému poškození, které dosahuje maximálního a optimálního osvětlení veřejného prostoru. A to bez zbytečných světelných zábran a světelného smogu, a to díky možnosti výběru z 5 různých typů optik. Proto je možné vytvořit osvětlení přesně podle Vašich potřeb. Díky mnoha konfiguracím, dlouhé životnosti, vysoké účinnosti a výběru z různých typů optik je svítidlo LED Pro-Cone vhodné pro široké použití. Například k osvětlení obytných zón, parkovišť, cyklostezek, náměstí i center měst.

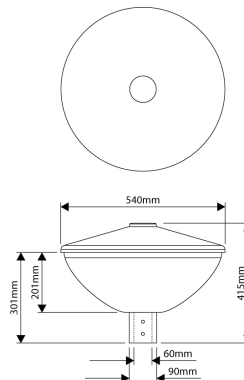

VLASTNOSTI PRODUKTU

Mounting method	Post top	LED nominal current at constant current	429 429 Milliampere
Lamp type	LED exchangeable	Nominal voltage	220 240 Volt
With light source	✓	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq)	90 Percentage
Lamp holder	None	Lumen maintenance at median useful life of 100,000 h at 25 °C ambient (tq)	80 Percentage
Housing material	Aluminium	Rated lifetime L70/B50 at 25 °C	150000 Hour
Surface protection	Other	Rated life time L80/B10 at 25 °C	110000 Hour
Housing colour	Black	Rated life time L90/B10 at 25 °C	55000 Hour
Material cover	Plastic matt/satinized	Rated ambient temperature according to IEC 62722-2-1	-25 50 Degrees celsius
Voltage type	AC	Cable length	5 Metre
With control gear	✓	Rated luminous flux according to IEC 62722-2-1	3000 Lumen
Type of control gear	LED operating device current-controlled	Max. system power	23,5 Watt
Exchangeable control gear	✓	Luminaire efficacy	127 Lumen/Watt
Dimming 0-10 V	✗	Colour temperature	3000 3000 Kelvin
Dimming 1-10 V	✓	Power factor	0,94
Dimming GPRS	✗	Height/depth	415 Millimetre
Dimming DALI	✗	Diameter	540 Millimetre
Dimming DMX	✗	Suitable for spigot size	60 60 Millimetre
Dimming DSI	✗	Number of poles	3
Dimming potentiometer (integrated)	✗	Conductor cross section	1 Square millimetre
Dimming LineSwitch	✗		
Dimming manufacturer's proprietary system	✗		
Dimming mains voltage modulation	✗		
Dimming phase cut-off (trailing edge)	✗		
Dimming phase cut-on (leading edge)	✗		
Dimming Touch and Dim	✗		
Dimming programmable	✓		

LED Pro-Cone

PAGINA 2/2

Pro-Cone typ optiky 5

41380149

EAN: 8720874790976

VLASTNOSTI PRODUKTU

(Pokračování)

Dimming with push-button	✗
No dim function	✗
Dimming RF	✗
Dimming Sine Wave Reduction	✗
Dimming Zigbee	✗
Light distributor	Focal lens
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Colour consistency (McAdam ellipse)	SDCM3
Containing product according to 2019/2020/EU	✓
Degree of protection (IP)	IP66
Degree of protection (NEMA)	3
Impact strength	IK10
Protection class according to IEC 61140	I
Remote control	None
With radio control	✗
Constant light output (CLO)	✗
With light regulation program control	✗
With connection cable	✓
Colour of light	White
Colour rendering index CRI	70-79
Type of wiring	Ending
Compatible with Apple HomeKit	✗
Compatible with Google Assistant	✗
Connection type	Screwed terminal
Compatible with Amazon Alexa	✗
IFTTT support available	✗
Operation by Bluetooth	✗