

## LED Urban

STR. 1/2


LED Icon 24 LEDS transprentní

# 44802200

EAN: 8720874793526

### K DISPOZICI V RŮZNÝCH MODELECH, KAPACITÁCH A PROVEDENÍCH

LED Urban série je charakterizovaná širokou nabídkou svítidel pro průmyslové ale i veřejné osvětlení. Svítidla jsou vhodná k několika typům instalace. Použitím stmívatelné varianty svítidel dosáhnete nastavení požadovaného osvětlení a díky tomu získáte nemalé úspory energie.

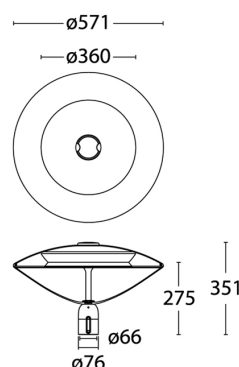

### VLASTNOSTI PRODUKTU

|                                           |                                         |                                                      |                        |
|-------------------------------------------|-----------------------------------------|------------------------------------------------------|------------------------|
| Mounting method                           | Post top/side entry                     | Suitable for number of light sources                 | 1                      |
| Lamp type                                 | LED not exchangeable                    | Nominal voltage                                      | 220 240 Volt           |
| With light source                         | ✓                                       | Nominal current                                      | 350 350 Milliampere    |
| Lamp holder                               | Other                                   | Rated life time L80/B10 at 25 °C                     | 100000 Hour            |
| Housing material                          | Aluminium                               | Rated ambient temperature according to IEC 62722-2-1 | -30 50 Degrees celsius |
| Surface protection                        | Powder coating                          | Cable length                                         | 1 Metre                |
| Housing colour                            | Grey                                    | Rated luminous flux according to IEC 62722-2-1       | 1600 Lumen             |
| Material cover                            | Plastic, transparent                    | Max. system power                                    | 15 Watt                |
| Voltage type                              | AC                                      | Luminaire efficacy                                   | 106,5 Lumen/Watt       |
| With control gear                         | ✓                                       | Colour temperature                                   | 3000 3000 Kelvin       |
| Type of control gear                      | LED operating device current-controlled | Power factor                                         | 0,9                    |
| Exchangeable control gear                 | ✓                                       | Height/depth                                         | 275 Millimetre         |
| Dimming 0-10 V                            | ✗                                       | Diameter                                             | 571 Millimetre         |
| Dimming 1-10 V                            | ✗                                       | Suitable for spigot size                             | 60 60 Millimetre       |
| Dimming GPRS                              | ✗                                       | Number of poles                                      | 3                      |
| Dimming DALI                              | ✗                                       | Conductor cross section                              | 1,5 Square millimetre  |
| Dimming DMX                               | ✗                                       |                                                      |                        |
| Dimming DSI                               | ✗                                       |                                                      |                        |
| Dimming potentiometer (integrated)        | ✗                                       |                                                      |                        |
| Dimming LineSwitch                        | ✗                                       |                                                      |                        |
| Dimming manufacturer's proprietary system | ✗                                       |                                                      |                        |
| Dimming mains voltage modulation          | ✗                                       |                                                      |                        |
| Dimming phase cut-off (trailing edge)     | ✗                                       |                                                      |                        |
| Dimming phase cut-on (leading edge)       | ✗                                       |                                                      |                        |
| Dimming Touch and Dim                     | ✗                                       |                                                      |                        |
| Dimming programmable                      | ✗                                       |                                                      |                        |
| Dimming with push-button                  | ✗                                       |                                                      |                        |
| No dim function                           | ✓                                       |                                                      |                        |
| Dimming RF                                | ✗                                       |                                                      |                        |

## LED Urban

PAGINA 2/2

LED Icon 24 LEDS transprentní

# 44802200

EAN: 8720874793526

### VLASTNOSTI PRODUKTU

(Pokračování)

|                                              |                  |
|----------------------------------------------|------------------|
| Dimming Sine Wave Reduction                  | ✗                |
| Dimming Zigbee                               | ✗                |
| Light distributor                            | Focal lens       |
| Energy efficiency class of the built-in lamp | A++, A+, A (LED) |
| Adjustable optics                            | ✗                |
| Colour consistency (McAdam ellipse)          | SDCM3            |
| Degree of protection (IP)                    | IP66             |
| Protection class according to IEC 61140      | II               |
| With radio control                           | ✗                |
| Constant light output (CLO)                  | ✗                |
| With light regulation program control        | ✗                |
| With connection cable                        | ✓                |
| Colour of light                              | White            |
| Colour rendering index CRI                   | 70-79            |
| Type of wiring                               | Ending           |
| Compatible with Apple HomeKit                | ✗                |
| Compatible with Google Assistant             | ✗                |
| Connection type                              | Screw terminal   |
| Compatible with Amazon Alexa                 | ✗                |
| IFTTT support available                      | ✗                |
| Operation by Bluetooth                       | ✗                |