

## LED Rockdisc II


LED Rockdisc II ø 360 mm (semi shielded)

# 40009171

EAN: 8720604743586

### ROBUST AND STYLISH

Modern, waterproof lighting for indoor and outdoor applications. Optionally available with emergency function and a new microwave sensor: 3-step dimming, on/off switch based upon daylight possible, detection range, (after-)burning time and daylight sensitivity adjustable. In addition, fixtures with and without sensor can be combined as master/slave.

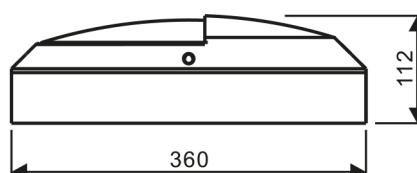

### PRODUCT FEATURES

|  |   |   |                        |
|--|---|---|------------------------|
| Suitable for wall mounting                     | ✓                                       | Nominal voltage   | 220 240 Volt           |
| Suitable for wall mounting                     | ✓                                       | Rated lifetime L70/B50 at 25 °C   | 175000 Hour            |
| Suitable for suspended mounting                | ✗                                       | Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq) | 90 Percentage          |
| Suitable for ceiling mounting                  | ✗                                       | Failure rate at median useful life of 50,000 h at 25 °C ambient (tq)      | 50 Percentage          |
| Suitable for built-in mounting                 | ✗                                       | Rated life time L90/B50 at 25 °C  | 50000 Hour             |
| Suitable for surface mounting                  | ✓                                       | Max. number of luminaires per miniature circuit breaker B16 (MCB)         | 56                     |
| Suitable for light line configuration          | ✗                                       | Max. number of luminaires per miniature circuit breaker C16 (MCB)         | 116                    |
| Suitable for workplace according to EN 12464-1 | ✗                                       | Rated ambient temperature according to IEC 62722-2-1                      | -20 50 Degrees celsius |
| Lamp type                                      | LED exchangeable                        | Luminaire efficacy  | 63 Lumen/Watt          |
| With light source                              | ✓                                       | Rated luminous flux according to IEC 62722-2-1                            | 1000 Lumen             |
| Lamp holder                                    | Other                                   | Max. system power   | 16 Watt                |
| Housing material                               | Aluminium                               | Colour temperature  | 3000 4000 Kelvin       |
| Surface protection housing                     | Lacquered                               | Power factor  | 0.9                    |
| Housing colour                                 | Grey                                    | Height/depth  | 112 Millimetre         |
| Material cover                                 | Plastic, opal                           | Outer diameter  | 360 Millimetre         |
| Type of grid                                   | None                                    | Number of poles   | 3                      |
| Voltage type                                   | AC                                      | Unified Glare Ratio (UGR)   | 19                     |
| Type of control gear                           | LED operating device current-controlled |   |                        |
| With control gear                              | ✓                                       |   |                        |
| Dimming 0-10 V                                 | ✗                                       |   |                        |
| Dimming 1-10 V                                 | ✗                                       |   |                        |
| Dimming DALI                                   | ✗                                       |   |                        |
| Dimming DALI-2                                 | ✗                                       |   |                        |
| Dimming DMX                                    | ✗                                       |   |                        |
| Dimming GPRS                                   | ✗                                       |   |                        |
| Dimming LineSwitch                             | ✗                                       |   |                        |
| Dimming DSI                                    | ✗                                       |   |                        |

## LED Rockdisc II

LED Rockdisc II ø 360 mm (semi shielded)

# 40009171

EAN: 8720604743586

### PRODUCT FEATURES

(continuation)

|   |                           |
|---|---------------------------|
| Dimming manufacturer's proprietary system                             | ✗                         |
| Dimming mains voltage modulation                                      | ✗                         |
| Dimming phase cut-off (trailing edge)                                 | ✗                         |
| Dimming phase cut-on (leading edge)                                   | ✗                         |
| Dimming programmable  | ✗                         |
| Dimming potentiometer (integrated)                                    | ✗                         |
| Dimming RF  | ✗                         |
| Dimming Sine Wave Reduction   | ✗                         |
| Dimming Touch and Dim   | ✗                         |
| Dimming Zigbee  | ✗                         |
| Dimming with push-button  | ✗                         |
| No dim function   | ✓                         |
| Dimming depending on control gear                                     | ✗                         |
| Light distributor   | Diffuser lens/optic/panel |
| Light distribution  | Symmetric                 |
| Beam angle  | > 80° - Extreme wide beam |
| Colour consistency (McAdam ellipse)                                   | SDCM3                     |
| Light outlet  | Direct                    |
| Containing product according to 2019/2020/EU                          | ✓                         |
| Energy efficiency class of the built-in lamp                          | A++, A+, A (LED)          |
| Degree of protection (IP)   | IP65                      |
| Impact strength   | IK10                      |
| Protection class according to IEC 61140                               | I                         |
| Emergency power supply integrated                                     | ✓                         |
| Suitable for emergency lighting                                       | ✓                         |
| With movement sensor  | ✓                         |
| With light sensor   | ✗                         |
| Covering of the luminaire with thermally insulating material possible | ✗                         |
| With air slots  | ✗                         |
| Filament test according to IEC 60695-2-11                             | 850 °C - 30 s             |
| Colour of light according to EN 12464-1                               | Neutral white 3300-5300 K |
| Colour of light   | White                     |
| Colour rendering index CRI  | 80-89                     |
| Type of wiring  | Ending                    |
| Connection type   | Push-in clamp             |
| Colour of light adjustable  | Positions                 |
| Luminous flux adjustable  | Positions                 |
| Beam angle adjustable   | No                        |
| Operation by Bluetooth  | ✗                         |
| Compatible with Apple HomeKit   | ✗                         |
| Compatible with Google Assistant                                      | ✗                         |
| Compatible with Amazon Alexa  | ✗                         |
| IFTTT support available   | ✗                         |