

LED Pro-Vision

PAGE 1/2


LED Pro-Vision Mini

41342121

EAN:

SAFE, STYLISH AND UNIVERSAL

The LED Pro-Vision series are stylish and modern designed luminaires. The mini, midi and maxi versions are used in public lighting of pavements, bicycle paths, district access, connecting and provincial roads. Also lighting of parking lots, company sites and around public buildings are appropriate application areas.

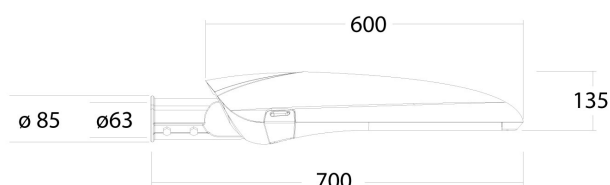

PRODUCT FEATURES

Mounting method	Post top/side entry	Suitable for number of light sources	1
Lamp type	LED not exchangeable	Nominal voltage	220 240 Volt
With light source	✓	Nominal current	300 300 Milliampere
Lamp holder	Other	Rated life time L80/B10 at 25 °C	100000 Hour
Housing material	Aluminium	Rated ambient temperature according to IEC 62722-2-1	-30 50 Degrees celsius
Surface protection	Powder coating	Cable length	1 Metre
Housing colour	Grey	Rated luminous flux according to IEC 62722-2-1	3200 Lumen
Material cover	Glass transparent	Max. system power	30 Watt
Voltage type	AC	Luminaire efficacy	106.5 Lumen/Watt
With control gear	✓	Colour temperature	4000 4000 Kelvin
Type of control gear	LED operating device current-controlled	Power factor	0.9
Exchangeable control gear	✓	Width	385 Millimetre
Dimming 0-10 V	✓	Height/depth	172 Millimetre
Dimming 1-10 V	✓	Length	829 Millimetre
Dimming GPRS	✗	Suitable for spigot size	60 60 Millimetre
Dimming DALI	✓	Number of poles	3
Dimming DMX	✗	Conductor cross section	1.5 Square millimetre
Dimming DSI	✗		
Dimming potentiometer (integrated)	✗		
Dimming LineSwitch	✗		
Dimming manufacturer's proprietary system	✗		
Dimming mains voltage modulation	✗		
Dimming phase cut-off (trailing edge)	✗		
Dimming phase cut-on (leading edge)	✗		
Dimming Touch and Dim	✗		
Dimming programmable	✓		
Dimming with push-button	✗		
No dim function	✗		
Dimming RF	✗		

LED Pro-Vision

LED Pro-Vision Mini

41342121

EAN:

PRODUCT FEATURES

(continuation)

Dimming Sine Wave Reduction	✗
Dimming Zigbee	✗
Light distributor	Focal lens
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Adjustable optics	✗
Colour consistency (McAdam ellipse)	SDCM3
Degree of protection (IP)	IP66
Impact strength	IK08
Protection class according to IEC 61140	II
Remote control	None
With radio control	✗
Constant light output (CLO)	✗
With light regulation program control	✗
With connection cable	✓
Colour of light	White
Colour rendering index CRI	70-79
Type of wiring	Ending
Compatible with Apple HomeKit	✗
Compatible with Google Assistant	✗
Compatible with Amazon Alexa	✗
Connection type	Screwed terminal
IFTTT support available	✗
Operation by Bluetooth	✗