

LED Urban

PAGE 1/2


LED Icon 24 LEDS transparent

44802100

EAN:

AVAILABLE IN VARIOUS MODELS, CAPACITIES AND DESIGNS

The LED Urban series is characterized by a wide range of luminaires for both industrial and public lighting applications. The luminaires are suitable for various mounting options. By the use of dimmable versions, it is possible to adjust the lighting level as desired so that substantial energy savings can be realized.

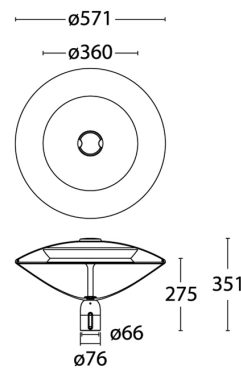

PRODUCT FEATURES

| | | | |
|---|---|--|------------------------|
| Mounting method | Post top/side entry | Suitable for number of light sources | 1 |
| Lamp type | LED not exchangeable | Nominal voltage | 220 240 Volt |
| With light source | ✓ | Nominal current | 350 350 Milliampere |
| Lamp holder | Other | Rated life time L80/B10 at 25 °C | 100000 Hour |
| Housing material | Aluminium | Rated ambient temperature according to IEC 62722-2-1 | -30 50 Degrees celsius |
| Surface protection | Powder coating | Cable length | 1 Metre |
| Housing colour | Grey | Rated luminous flux according to IEC 62722-2-1 | 1600 Lumen |
| Material cover | Plastic, transparent | Max. system power | 15 Watt |
| Voltage type | AC | Luminaire efficacy | 106.5 Lumen/Watt |
| With control gear | ✓ | Colour temperature | 3000 3000 Kelvin |
| Type of control gear | LED operating device current-controlled | Power factor | 0.9 |
| Exchangeable control gear | ✓ | Height/depth | 275 Millimetre |
| Dimming 0-10 V | ✗ | Diameter | 571 Millimetre |
| Dimming 1-10 V | ✗ | Suitable for spigot size | 60 60 Millimetre |
| Dimming GPRS | ✗ | Number of poles | 3 |
| Dimming DALI | ✗ | Conductor cross section | 1.5 Square millimetre |
| Dimming DMX | ✗ | | |
| Dimming DSI | ✗ | | |
| Dimming potentiometer (integrated) | ✗ | | |
| Dimming LineSwitch | ✗ | | |
| Dimming manufacturer's proprietary system | ✗ | | |
| Dimming mains voltage modulation | ✗ | | |
| Dimming phase cut-off (trailing edge) | ✗ | | |
| Dimming phase cut-on (leading edge) | ✗ | | |
| Dimming Touch and Dim | ✗ | | |
| Dimming programmable | ✗ | | |
| Dimming with push-button | ✗ | | |
| No dim function | ✓ | | |
| Dimming RF | ✗ | | |

LED Urban

PAGE 2/2

LED Icon 24 LEDS transparent

44802100

EAN:

PRODUCT FEATURES

(continuation)

| | |
|--|------------------|
| Dimming Sine Wave Reduction | ✗ |
| Dimming Zigbee | ✗ |
| Light distributor | Focal lens |
| Energy efficiency class of the built-in lamp | A++, A+, A (LED) |
| Adjustable optics | ✗ |
| Colour consistency (McAdam ellipse) | SDCM3 |
| Degree of protection (IP) | IP66 |
| Protection class according to IEC 61140 | II |
| With radio control | ✗ |
| Constant light output (CLO) | ✗ |
| With light regulation program control | ✗ |
| With connection cable | ✓ |
| Colour of light | White |
| Colour rendering index CRI | 70-79 |
| Type of wiring | Ending |
| Compatible with Apple HomeKit | ✗ |
| Compatible with Google Assistant | ✗ |
| Compatible with Amazon Alexa | ✗ |
| Connection type | Screwed terminal |
| IFTTT support available | ✗ |
| Operation by Bluetooth | ✗ |