

## LED Rockdisc II


LED Rockdisc II ø 360 mm (semi shielded)

# 40009161

EAN: 8720604743579

### ROBUST AND STYLISH

Modern, waterproof lighting for indoor and outdoor applications. Optionally available with emergency function and a new microwave sensor: 3-step dimming, on/off switch based upon daylight possible, detection range, (after-)burning time and daylight sensitivity adjustable. In addition, fixtures with and without sensor can be combined as master/slave.

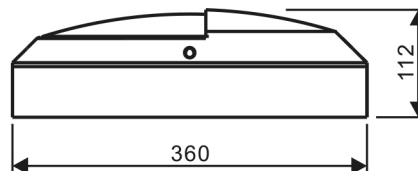

### PRODUCT FEATURES

Suitable for wall mounting	✓	Nominal voltage	220 240 Volt
Suitable for wall mounting	✓	Rated life time L70/B50 at 25 °C	175000 Hour
Suitable for suspended mounting	✗	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq)	90 Percentage
Suitable for ceiling mounting	✓	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq)	50 Percentage
Suitable for built-in mounting	✗	Max. number of luminaires per miniature circuit breaker B16 (MCB)	58
Suitable for surface mounting	✓	Max. number of luminaires per miniature circuit breaker C16 (MCB)	120
Suitable for light line configuration	✗	Rated life time L90/B50 at 25 °C	50000 Hour
Suitable for workplace according to EN 12464-1	✗	Rated ambient temperature according to IEC 62722-2-1	-20 50 Degrees celsius
Lamp type	LED not exchangeable	Max. system power	15.5 Watt
With light source	✓	Luminaire efficacy	65 Lumen/Watt
Lamp holder	Other	Rated luminous flux according to IEC 62722-2-1	1000 Lumen
Housing material	Aluminium	Colour temperature	3000 4000 Kelvin
Surface protection housing	Lacquered	Power factor	0.9
Housing colour	Grey	Height/depth	112 Millimetre
Material cover	Plastic, opal	Outer diameter	360 Millimetre
Type of grid	None	Number of poles	3
Voltage type	AC	Unified Glare Ratio (UGR)	19
Type of control gear	LED operating device current-controlled		
With control gear	✓		
Dimming 0-10 V	✗		
Dimming 1-10 V	✗		
Dimming DALI-2	✗		
Dimming DALI	✗		
Dimming DMX	✗		
Dimming DSI	✗		
Dimming potentiometer (integrated)	✗		
Dimming GPRS	✗		

## LED Rockdisc II

LED Rockdisc II ø 360 mm (semi shielded)

# 40009161

EAN: 8720604743579

### PRODUCT FEATURES

(continuation)

Dimming LineSwitch	✗
Dimming manufacturer's proprietary system	✗
Dimming mains voltage modulation	✗
Dimming phase cut-off	✗
Dimming phase cut-on	✗
Dimming programmable	✗
Dimming RF	✗
Dimming Sine Wave Reduction	✗
Dimming Touch and Dim	✗
Dimming Zigbee	✗
Dimming with push-button	✗
No dim function	✓
Dimming depending on control gear	✗
Light distributor	Diffuser lens/optic/panel
Light sharing	Symmetric
Beam angle	Extreme wide beam >80°
Colour consistency (McAdam ellipse)	SDCM3
Light outlet	Direct
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Degree of protection (IP)	IP65
Impact strength	IK10
Protection class	I
Suitable for emergency lighting	✓
Emergency power supply integrated	✓
With movement sensor	✗
With light sensor	✗
Covering of the luminaire with thermally insulating material possible	✗
With air slots	✗
Colour of light	White
Colour rendering index CRI	80-89
Colour of light according to EN 12464-1	Neutral white 3300-5300 K
Type of wiring	Ending
Connection type	Push-in clamp
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Operation by Bluetooth	✗
Compatible with Apple HomeKit	✗
Compatible with Google Assistant	✗
Compatible with Amazon Alexa	✗
IFTTT support available	✗