


LED Prodisc 348 mm switchable

40009322

EAN: 8720615508273

EASY TO MOUNT SURFACE-MOUNTED AND SEMI-SURFACE-MOUNTED LUMINAIRE

The LED Prodisc luminaire provides high energy savings (> 70%) through intelligent lighting management with presence detectors. Safety is the prime consideration in stairwells and hallways. They must be properly illuminated with enough brightness without reflections to ensure safe passage. The LED Prodisc is highly suitable for this.

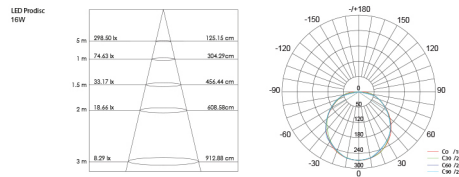

PRODUCT FEATURES

Suitable for wall mounting	✓	Nominal voltage	220 240 Volt
Suitable for wall mounting	✓	Rated life time L70/B50 at 25 °C	175000 Hour
Suitable for suspended mounting	✗	Lumen maintenance at median useful life of 50,000 h at 25 °C ambient (tq)	90 Percentage
Suitable for ceiling mounting	✓	Failure rate at median useful life of 50,000 h at 25 °C ambient (tq)	50 Percentage
Suitable for built-in mounting	✗	Rated life time L80/B10 at 25 °C	100000 Hour
Suitable for surface mounting	✓	Max. number of luminaires per miniature circuit breaker B16 (MCB)	64
Suitable for light line configuration	✗	Max. number of luminaires per miniature circuit breaker C16 (MCB)	128
Suitable for workplace according to EN 12464-1	✗	Rated life time L90/B50 at 25 °C	50000 Hour
Lamp type	LED not exchangeable	Rated ambient temperature according to IEC 62722-2-1	-20 50 Degrees celsius
With light source	✓	Max. system power	13 Watt
Lamp holder	Other	Luminaire efficacy	100 Lumen/Watt
Housing material	Plastic	Rated luminous flux according to IEC 62722-2-1	1300 Lumen
Surface protection housing	Other	Colour temperature	3000 4000 Kelvin
Housing colour	White	Power factor	0.9
Material cover	Plastic, opal	Height/depth	100 Millimetre
Type of grid	None	Outer diameter	348 Millimetre
Voltage type	AC	Number of poles	2
Type of control gear	LED operating device current-controlled		
With control gear	✓		
Exchangeable control gear	✗		
Dimming 0-10 V	✗		
Dimming 1-10 V	✗		
Dimming DALI-2	✗		
Dimming DALI	✗		
Dimming DMX	✗		
Dimming DSI	✗		

LED Prodisc

LED Prodisc 348 mm switchable

40009322

EAN: 8720615508273

PRODUCT FEATURES

(continuation)

Dimming potentiometer (integrated)	✗
Dimming GPRS	✗
Dimming LineSwitch	✗
Dimming manufacturer's proprietary system	✗
Dimming mains voltage modulation	✗
Dimming phase cut-off	✗
Dimming phase cut-on	✗
Dimming programmable	✗
Dimming RF	✗
Dimming Sine Wave Reduction	✗
Dimming Touch and Dim	✗
Dimming Zigbee	✗
Dimming with push-button	✗
No dim function	✓
Dimming depending on control gear	✗
Light distributor	Diffuser lens/optic/panel
Light sharing	Symmetric
Beam angle	Extreme wide beam >80°
Colour consistency (McAdam ellipse)	SDCM3
Light outlet	Direct
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Degree of protection (IP)	IP44
Impact strength	IK10
Protection class	II
Suitable for emergency lighting	✓
Emergency power supply integrated	✓
With movement sensor	✗
With light sensor	✗
Covering of the luminaire with thermally insulating material possible	✗
With air slots	✗
Colour of light	White
Colour rendering index CRI	80-89
Colour of light according to EN 12464-1	Neutral white 3300-5300 K
Type of wiring	Ending
Connection type	Push-in clamp
Colour of light adjustable	Positions
Luminous flux adjustable	Positions
Beam angle adjustable	No
Operation by Bluetooth	✗
Compatible with Apple HomeKit	✗
Compatible with Google Assistant	✗
Compatible with Amazon Alexa	✗
IFTTT support available	✗