


LED Icon 24 LEDS se stíním

44821301

EAN:

K DISPOZICI V RZNYCH MODELECH, KAPACITACH A PROVEDENICH

LED Urban série je charakterizovaná širokou nabídkou svítidel pro průmyslové ale i veřejné osvětlení. Svítidla jsou vhodná k několika typům instalace. Použitím stmívatelné varianty svítidel dosáhnete nastavení požadovaného osvětlení a díky tomu získáte nemalé úspory energie.

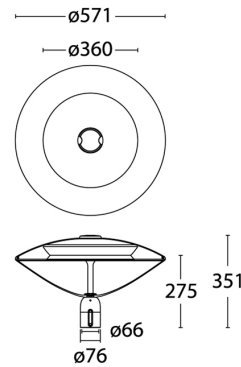

VLASTNOSTI PRODUKTU

Mounting method	Post top/side entry	Suitable for number of light sources	1
Lamp type	LED not exchangeable	Nominal voltage	220 240 Volt
With light source	✓	Nominal current	350 350 Milliampere
Lamp holder	Other	Rated life time L80/B10 at 25 °C	100000 Hour
Housing material	Aluminium	Rated ambient temperature according to IEC 62722-2-1	-30 50 Degrees celsius
Surface protection	Powder coating	Cable length	1 Metre
Housing colour	Grey	Rated luminous flux according to IEC 62722-2-1	1000 Lumen
Material cover	Plastic, transparent	Max. system power	9 Watt
Voltage type	AC	Luminaire efficacy	111 Lumen/Watt
With control gear	✓	Colour temperature	4000 4000 Kelvin
Type of control gear	LED operating device current-controlled	Power factor	0,9
Exchangeable control gear	✓	Height/depth	275 Millimetre
Dimming 0-10 V	✗	Diameter	571 Millimetre
Dimming 1-10 V	✗	Suitable for spigot size	60 60 Millimetre
Dimming GPRS	✗	Number of poles	3
Dimming DALI	✗	Conductor cross section	1,5 Square millimetre
Dimming DMX	✗		
Dimming DSI	✗		
Dimming potentiometer (integrated)	✗		
Dimming LineSwitch	✗		
Dimming manufacturer's proprietary system	✗		
Dimming mains voltage modulation	✗		
Dimming phase cut-off (trailing edge)	✗		
Dimming phase cut-on (leading edge)	✗		
Dimming Touch and Dim	✗		
Dimming programmable	✗		
Dimming with push-button	✗		
No dim function	✓		
Dimming RF	✗		

LED Urban

LED Icon 24 LEDS se stínním

44821301

EAN:

VLASTNOSTI PRODUKTU

(Pokraování)

Dimming Sine Wave Reduction	✘
Dimming Zigbee	✘
Light distributor	Focal lens
Energy efficiency class of the built-in lamp	A++, A+, A (LED)
Adjustable optics	✘
Colour consistency (McAdam ellipse)	SDCM3
Degree of protection (IP)	IP66
Protection class according to IEC 61140	II
With radio control	✘
Constant light output (CLO)	✘
With light regulation program control	✘
With connection cable	✓
Colour of light	White
Colour rendering index CRI	70-79
Type of wiring	Ending
Compatible with Apple HomeKit	✘
Compatible with Google Assistant	✘
Compatible with Amazon Alexa	✘
Connection type	Screw terminal
IFTTT support available	✘
Operation by Bluetooth	✘